




Jabra CRUISER2 Front Plate Replacement

Follow this guide to remove the front plate from the device.

Written By: Spartacus

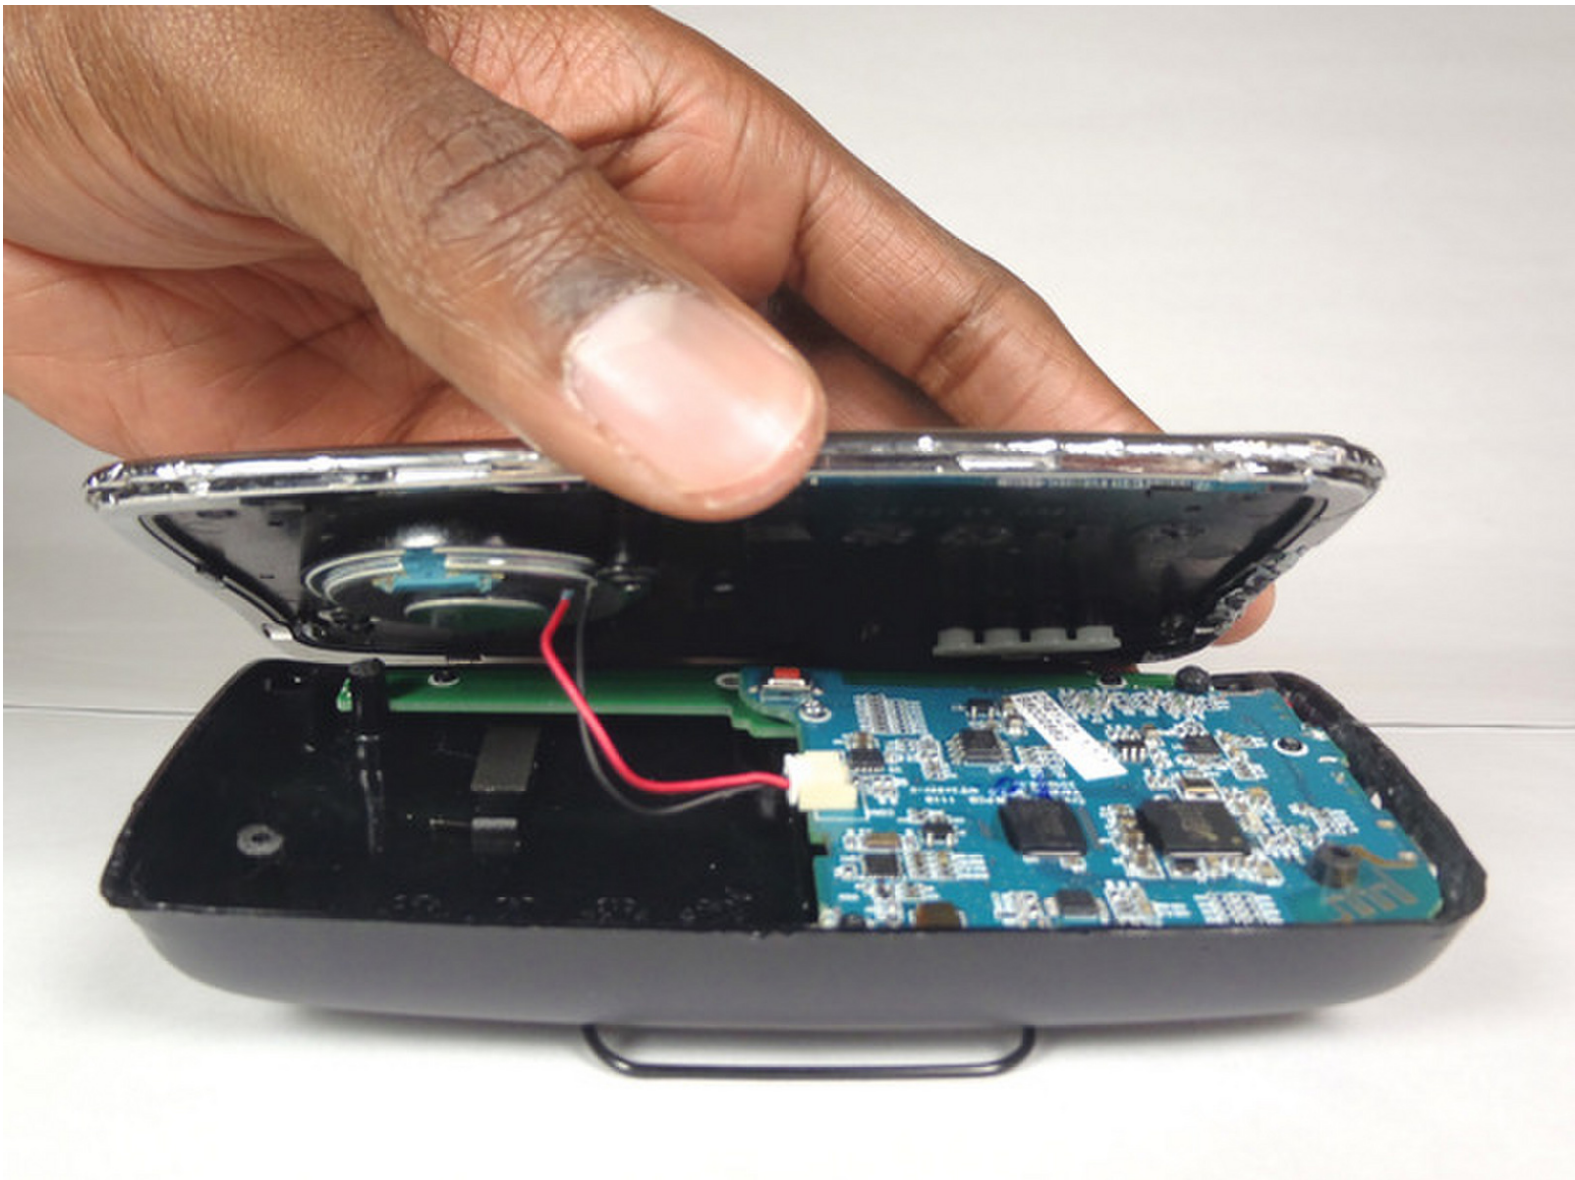

INTRODUCTION

Removing the front plate will provide you access to other parts of the device that need repair.

TOOLS:

- [iOpener](#) (1)
 - [iFixit Opening Tools](#) (1)
 - [Microwave](#) (1)
-

Step 1 — Front Plate




- Use the iOpener tool to unglue the adhesive of the device. The link to the iOpener instructions are listed below.
- [iOpener Instructions](#)

Step 2



- Place the flat head of the bigger plastic opening tool in between the front plate and back plate.
- Pull the tool toward the back of the device to pry it open.
- Repeat this process over all edges of the device.

Step 3

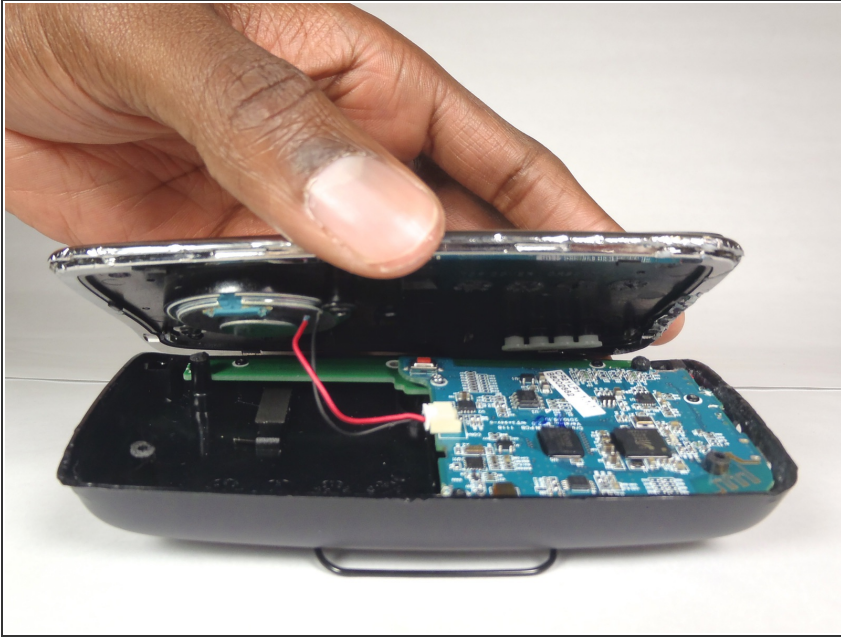

- Open up the device by pulling the front plate straight up from the back plate.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-07-07 04:44:02 PM.